Pro8300

3000 lumen XGA

Full HD 1080p Business Projector

ViewSonic's Pro8300 is a Full HD 1080p DLP® projector that delivers high definition 1920 x 1080 native resolution, making it ideal for presenting HD content. The native wide format aspect ratio is perfect for widescreen applications and devices as well as HD viewing. The Pro8300 combines state-of-the art DLP® and BrilliantColor™ technology with powerful Pixelworks® 10-bit image processor to deliver a stunning visual experience for any business application, while 3000 ANSI lumens and 4000:1 high contrast ratio make this 1080p 1920x1080 business projector shine in any ambient light. With extensive connectivity options, including dual HDMI and dual VGA inputs, making it easy to connect to any business devices like desktops, laptops, tablets, smart phones and more, the Pro8300 1080p DLP projector is the perfect projector for corporate environments.

pixelworks

> Full HD 1080p for widescreen brilliance
A widescreen projector sporting a full HD 1920x1080 (1080p) native resolution offers a tremendous degree of flexibility and compatibility. Whether you are connecting your widescreen notebook in a conference room or viewing 720p / 1080p HD content, you are guaranteed a distortion-free image with matching aspect ratio.

> Bright in virtually any setting with 3,000 lumens
Packs 3,000 lumens with 4000:1 high contrast ratio (DCR) make this the perfect choice for conference rooms and board rooms.

> High performance Pixelworks® PW980 image processor
With full 10-bit image colour processing, detail enhancement and noise reduction technology for crisper, sharper presentations.

> HDMI True Digital Connectivity
Equipped with dual HDMI inputs, it delivers the highest picture and sound quality without losing any degradation. It's ideal for connecting to any HDMI-enabled devices from smart phones, tablets, laptops, computers to Blu-ray® DVD players.

> BrilliantColor™ technology
Latest BrilliantColor™ technology delivers stunning all-digital clarity with life-like colours, sharp graphics and outstanding images. The advanced 6-segment colour wheel enhances the yellow colour performance that is key to accurate and vivid colour reproduction.

> Give greener presentations and save
Use energy-saving eco-mode to lower power consumption, extend lamp life and reduce noise. Filter-less design for saving maintenance costs and labour.

> Two 10W speakers for superior sound and audio output
Enhance audio performance and provide high volume audio for meeting rooms without the need for external speakers.

> Wide 1.5x optical zoom adjustment
Enables the Pro8300 to project the most appropriate screen size in different applications – it can project 100" 16:9 images from short distances, as low as 3.16 to 4.65 meters away.

ViewSonic®
See the difference™

ViewSonic®
See the difference™

Pro8300

HIGH RESOLUTION PROJECTOR FOR PERFECT CLASSROOM PRESENTATIONS

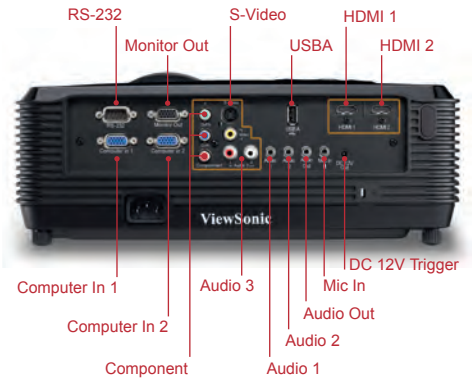

Optional Accessories	
Replacement Lamp	RLC-061

Projection Distance	Screen Size (aspect ratio16:9)
Metres	Inches
1.2 - 1.9	40
1.5 - 2.4	50
1.8 - 2.8	60
2.2 - 3.3	70
2.5 - 3.8	80
2.8 - 4.3	90
3.1 - 4.8	100

DISPLAY	Technology	0.65” Digital Micromirror Device (DLPTM)
	Resolution	1920 x 1080 (native)
	Keystone Correction	+/- 20° (Vertical)
	Image Size	30” ~ 300”
	Projection Distance	0.9m - 10.0m
	Throw Ratio	1.4:1 ~ 2.14:1
	Lamp Life (hours)	2500 / 4000 hours (Norm /Eco)
	Brightness	3000 lumens
	Contrast Ratio	4000:1 (with DCR)
	Aspect Ratio	16:9 / 4:3 / auto
	Lens	x 1.5 Manual optical zoom / Manual optical focus
AUDIO	Speaker	10W x 2
INPUT SIGNAL	Computer and Video	PAL, SECAM, NTSC
		480i / 480P and 576i / 576P
		720p / 1080i / 1080p
	Frequency	Horizontal: 30 ~ 100 kHz
		Vertical: 50 ~ 85 Hz
COMPATIBILITY	PC	VGA to UXGA
	MAC	VGA to SXGA+ (*May require a MAC adaptor)
INPUT	RGB	Dsub-15 x 2
	Component Input	x 1
	S-Video	x 1
	Composite	x 1
	Audio	3.5mm mini jack x 2
	USB	Type A (service port) x 1
	HDMI	HDMI 1.3 x 2
OUTPUT	RGB	Dsub-15 x 1
	Audio	3.5mm mini jack x 1
NETWORK	RJ45	x 1
CONTROL	12V Trigger	x 1
	RS232	x 1
POWER	Voltage	100V ~ 240Vac 50 / 60Hz
	Consumption	310W
LANGUAGES		English / Dutch / French / Spanish / Italian / Korean /
		Thai / Portuguese / Traditional / Chinese /
		Simplified Chinese / Japanese / Russian / German /
		Swedish / Turkish / Finnish / Polish
OPERATING	Temperature	0° ~ 40° C (32° ~ 100° F)
ENVIRONMENT	Humidity	10 ~ 90% (Non-condensation)
	Altitude	0 ~ 6,000 feet
NOISE LEVEL		33dB / 29dB (norm/ eco mode)
DIMENSION	(W x D x H)	333 x 263 x 110mm (13.11” x 10.35” x 4.33”)
WEIGHT (NET)		3.86kg (8.5lbs)
REGULATIONS		CB, RoHS, SVHG, WEEE, UL / cUL, FCC-B,
		ICES-004, TUV-S (Argentina), NOM, PSB, C-tick,
		KC, CE, GOST-R, Hygenic, UKrSEPRO, CCC
PACKAGE CONTENTS		Projector, Power Cord, VGA Cable, Lens Cap,
		Remote Control, AAA Batteries, Quick Start Guide,
		ViewSonic DVD Wizard (With User Manual),
		Soft Carry Case.

ISO 9001:2000
FM 40187

ISO 14001:1996
FM 40968

ViewSonic Corporation's QMS & EMS have been registered to ISO 9001 & ISO 14001, respectively, by the British Standards Institution.

DLP® and the DLP logo are registered trademarks of Texas Instruments and BrilliantColor™ is a trademark of Texas Instruments. Specifications subject to change without notice. Selection, offers and programs may vary by country; see your ViewSonic representative for complete details. Corporate names, trademarks stated herein are the property of their respective companies.
Copyright © 2012 ViewSonic Corporation. All rights reserved.